







Cut List






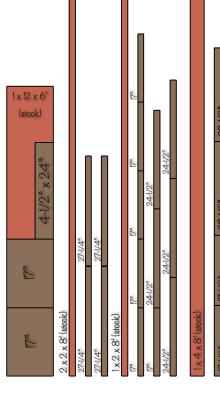


Step 1: Assemble Side Panels (Qty 2)

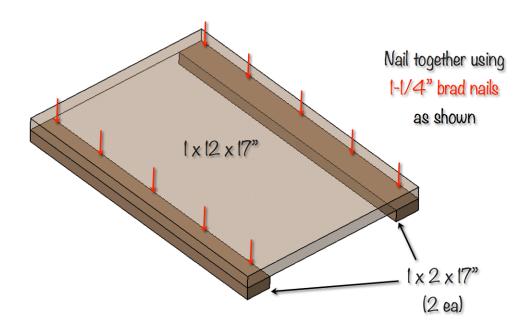

Step 2: Assemble Sides (Qty 2)

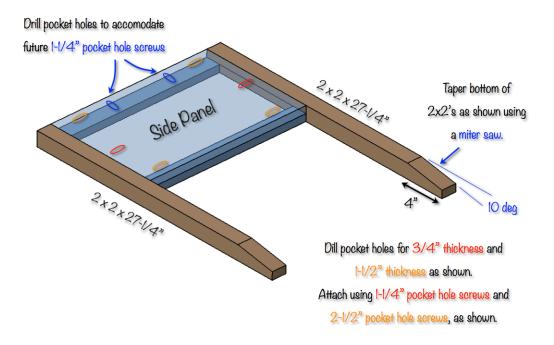


Step 3: Assemble Carcass




Drill pocket holes in the five $1 \times 2 \times 24$ -1/2" boards. Pocket holes shown in blue will be used to fasten the top in the next step.

Assemble carcass, as shown, using 1-1/4" pocket hole screws.

Step 4: Add Top

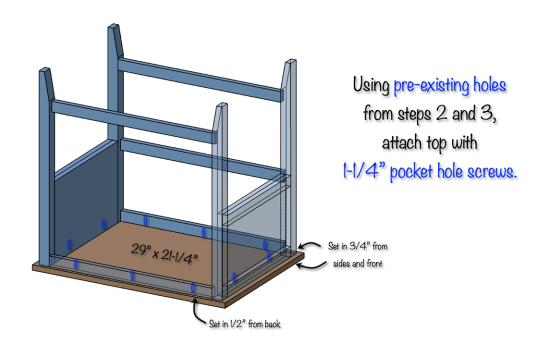

Step 5: Add Shelves

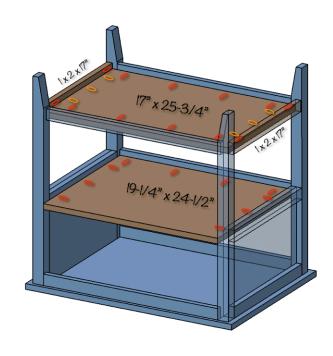


Orill pocket holes in all boards as shown.

Assemble lower shelf using 1-1/4" pocket hole screws.

Assure shelves are level and install as shown using I-I/4" pocket hole screws.

Step 6: Assemble Drawer Box

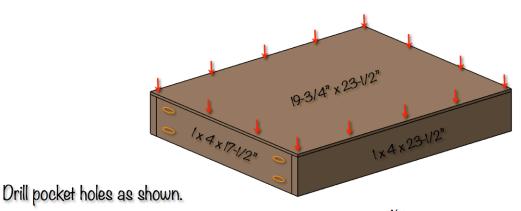


Then assemble box using 1-1/4" pocket hole screws and 1-1/4" brad nails.

Note:

Double check width of opening. This should be 24-1/2". If it is more or less your should adjust the width of your drawer box accordingly.


Step 7: Install Drawer

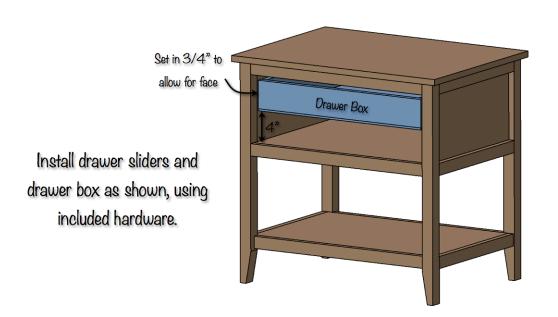


Step 8: Install Drawer Front

Add some weight inside your drawer and close it. Situate your drawer front as shown and tack in place using I-I/4" brad nails.

Remove the drawer and then from the inside, screw through to the drawer front using I-I/4" wood screws.





...to finish, add hardware and trim as desired.

Step 9: Add Back Panel

Install I/4" plywood back panel using I-1/4" brad nails

